

ARTICULATED DUMP TRUCK



Specification

Maximum Payload	27.5 tons (25 t)
Heaped Capacity	20.3 yd ³ (15.5 m ³)
Horsepower	311 hp (232 kW)

Features

- ▶ High powered, heavy-duty truck providing class leading performance and ability to go where others can't follow
- ▶ World class operator's environment
- ▶ One of the most fuel efficient trucks in the field
- ▶ Rigorously tested in extreme conditions for proven power, productivity and reliability
- ▶ Superior gradeability and higher top speeds increase production

SPECIFICATIONS

ENGINE

Engine	Scania DC9
Type	5 cylinder, in-line, 4-cycle, direct injection diesel, water cooled, turbo charged w/ air to air charge cooling, electronic engine mgmt & engine exhaust brake
Piston Displacement	567 in ³ (9.3 L)
Bore x Stroke	5.12 x 5.51 mm (130 x 140 in)
Gross Power @ 1800 rpm	311 hp (232 kW)
Net Power @ 2100 rpm	287 hp (214 kW)
Max Torque @ 1400 rpm	1234 lbf ft (1673 Nm)
Gross Power rated	SAE J1995 Jun 90
Engine Emissions	US Tier 4i/EU Stage 3B. Variant available to meet US Tier 2/EU Stage 2.
Electrical	24 volt electric start. 100A alternator. Two 12 volt 175 Ah batteries
Air Cleaner	Dry-type air cleaner w/ safety element, auto dust ejector & restriction indicator
Fan	Modulating fan reduces noise level and consumes engine power as required. Note: Net hp with fan clutch disengaged
Altitude	9842 ft (3000 m)

TRANSMISSION

Transmission:	ZF 6WG 260 RPC. Fully automatic with manual over-ride and retarder.		
Assembly:	Consists of a torque converter close-coupled to a countershaft type gearbox with integral output transfer gearing. Automatic shifting throughout the range, with kick-down feature. Lockup in all forward gears. A torque-proportioning output differential transmits drive permanently to front and rear axles. This differential may be locked by the driver for use in difficult traction conditions. Auto slip sensing traction as standard.		
Speeds	Gear	Forward	Reverse
<i>Fully Laden</i>	1	3.5 mph (5.6 km/h)	3.5 mph (5.6 km/h)
	2	5.3 mph (8.6 km/h)	8.3 mph (13.3 km/h)
	3	8.3 mph (13.3 km/h)	30.2 mph (18.8 km/h)
	4	12.8 mph (20.6 km/h)	
	5	30.2 mph (18.8 km/h)	
	6	50 mph (31 km/h)	

AXLES

Type: Heavy duty axles with fully floating axle shafts and outboard planetary reduction gearing. The three axles are in permanent all-wheel drive (6x6) with a differential coupling between the front and rear axles. All three axles also have hydraulically actuated multiplate transverse diff-lock differentials for 100% cross-axle lock up. The inter-axle and cross-axle diff locks are controlled by the operator, and can be actuated when required in poor traction conditions.

Differential ratio	3.875 : 1
Planetary reduction	5.71 : 1
Overall Drivetrain reduction	22.12 : 1

SUSPENSION

Front: Axle is carried on the leading arms of a sub-frame which pivots on the main frame. Fully independent suspension available as an option.

Rear: Each axle is coupled to the frame by three rubber-bushed links with lateral restraint by a transverse link. Pivoting inter-axle balance beams equalize load on each rear axle. Suspension movement is cushioned by rubber/metal laminated compression units between each axle & underside of balance beam ends. Pivot points on leading & trailing links are rubber-bushed for minimum maintenance.

FRAME

Front and rear frames are all-welded high grade steel fabrications with rectangular box-section beams forming the main side and cross members. Inter-frame oscillation is provided by a large diameter cylindrical coupling which houses nylon bushings. Frames articulated 45° to either side for steering by means of two widely-spaced pivot pins in back-to-back sealed taper roller bearings.

STEERING

Hydrostatic power steering by two double-acting cushioned steering cylinders with pressure supplied by a variable displacement / load sensing piston pump. Secondary steering pressure is provided by a ground driven pump. An audible alarm and warning light indicates should the secondary system activate.

Steering Angle to either side	45°
Lock to lock turns, steering wheel	4
System Pressure	3500 lbf/in ² (241 bar)
SAE Turning Radius	27 ft 9 in (8470 mm)
Clearing Radius	29 ft 4 in (8950 mm)

BODY

All-welded construction, fabricated from high hardness (min 360 BHN) 1000 Mpa (145000 lbf/in²) yield strength steel. Dual slope tailchute improves material ejection from body.

Plate thickness:	Floor and tailchute	0.55 in (14.0 mm)
	Sides	0.47 in (12.0 mm)
	Front	0.31 in (8.0 mm)
Volume:	Struck	16.4 yd ³ (12.5 m ³)
	Heaped 2:1 (SAE)	20.3 yd ³ (15.5 m ³)

HOIST

Two single-stage, double-acting hoist cylinders, cushioned at the base end. Variable displacement / load sensing piston pump driven from power take-off on transmission. Full flow return line filtration. Full electro-hydraulic hoist control, with electronic detent in power down.

System pressure	3200 lbf/in ² (220 bar)
Pump output flow rate	77.6 gal/min (4.9 liter/sec)
Raise (loaded)	12 seconds
Lower	7.5 seconds

TIRES AND WHEELS

Tires	Standard 23.5; Optional 750/65
Rims	Standard: 25x19.50; Optional: 25x22.00
Wheels	3-piece earthmover rims with 12 stud fixing

BRAKES

All hydraulic braking systems with multi-plate sealed and oil cooled brake packs at each wheel. Independent circuits for front and rear brake systems.

Parking	Spring-applied, hydraulic-released disc on rear driveline
Secondary	Secondary brake control actuates service and parking brakes
Retarder	Exhaust brake and transmission retarder

CAPACITIES

Fuel Tank	97.7 gal	370 L
Hydraulic System (Steering & Body)	67.2 gal	256 L
Engine Crankcase	11.8 gal	45 L
Cooling System	12.8 gal	48.8 L
Transmission (including filters and cooler)	12.9 gal	49 L
Differential - Front & Rear (each)	5.5 gal	21 L
Differential - Center	6.0 gal	23 L
Planetaries (each)	2.0 gal	7.5 L
DEF System*	13.7 gal	52 L

*only applicable on Tier 4i model



AUTO TRANS spol. s r.o.
Konecchlumského 513, 506 01 Jičín
telefon: +420 493 538 066
e-mail: info@atsjicin.cz

Prodej vozidel a strojů
+420 733 539 789
+420 603 497 392
prodej@atsjicin.cz

www.atsjicin.cz

STANDARD EQUIPMENT

TIER 4 TA250

GENERAL

Articulation and Oscillation Lock	Mudflaps at Front and Center
Battery Master Switch	Neutral Start Interlock
Body Prop	Pivot Protection Guard
Brakes Fully Hydraulic Dual Circuit System	Rear Light Guards
Diagnostic Pressure Test Points	Reverse Alarm Audible J994
Differential Locks	Secondary Steering
Electronic Assisted Body Hoist Control	Security Kit
Engine/Transmission/Hydraulic Electronic Mgmt Systems	Tilting Cab for Maintenance
Engine Underguard	Tow Points, Front and Rear
Exhaust Muffler	Transmission Downshift Inhibitor
Handrails on Fenders	Transmission Oil Cooler
Horn, Electric 117db	Transmission Retarder
Hydraulic Filter Restriction Indicator	Transmission Sump Guard
Hydraulic Oil Cooler	Tire Inflation Nitrogen
Modulating Cooling Fans	Exhaust Brake
Mirror with Wide Angle	

OPERATOR CABIN

Air Conditioning	Rear Vision Camera/Monitor
Air Filter Restriction Indicator	ROPS/FOPS Protection ISO3471/3449
Auxiliary Power Outlets 12V & 24V	Seat Belts Retractable J386
CD/Tuner/MP3 Connectivity	Steering Wheel, tilt/telescopic
Coat Hook	Forward Facing Trainer Seats
Engine/Transmission/Hydraulic Diagnostic Facility	Seat, Operator, Air Suspension, High Back, Headrest and Adjustable Armrests
Heating, Ventilation and Air Conditioning System	Wiper and Washer, Front and Rear Windows
Insulation, Thermal and Acoustic	Sun Visor (Internal)
Interior Light	Tinted Glass
Mirror Rear View (4)	Window Protection Grille, Rear
Mug Holder	Storage Compartment

OPTIONAL EQUIPMENT

BODY OPTIONS

Body Side Extensions	Spillguard Extension
Heated Body	Chain Operated Top Mounted Tailgate
Liner Plates	

MIRRORS

Mirror Front Mounted	Mirrors Heated
----------------------	----------------

WARNING LIGHTS & ALARMS

Alternator Charging	Front Brake Accumulator Pressure
Body Up	Headlight High Beam
Differential Lock	Headlights Active
Direction Indicators	Hydraulic Oil Level Low
Engine Air Filter Change	Low Fuel
Engine 'CHECK'	Parking Brake
Engine Coolant Level Low	Rear Brake Accumulator Pressure
Engine Oil Pressure Low	Secondary Steering
Engine Over-speed Active	Transmission Check
Engine 'STOP'	Transmission High Oil Temperature
Exhaust Brake	Transmission Retarder

GAUGES

Body Dump Counter	Hourmeter
DEF Level Gauge (T4 variant only)	Hydraulic oil Temperature
DEF Level Warning (T4 variant only)	Speedometer/Digital Odometer/Tripmeter
Engine Coolant Temperature	Tachometer
Fuel Consumption/Usage	Transmission Oil Temperature
Fuel Level	

LIGHTS

Direction and Hazard Warning Indicators (LED on Rear)	Side and Tail (LED)
Front Working Lights, Roof Mounted	2 Halogen Headlamps Low Beam
Reverse Warning	2 Halogen Headlamps High Beam


LIGHTS

Beacon Flashing	Rear Working Lights, Roof Mounted
Fog Rear	Reverse Flashing

OTHER OPTIONS

Automatic Lubrication	Payload Monitoring System
Fire Extinguisher	Seat Heated
First Aid Kit	Tool Kit
Parking Brake Guard	Hydraulic Oil Cooler

DIMENSIONS

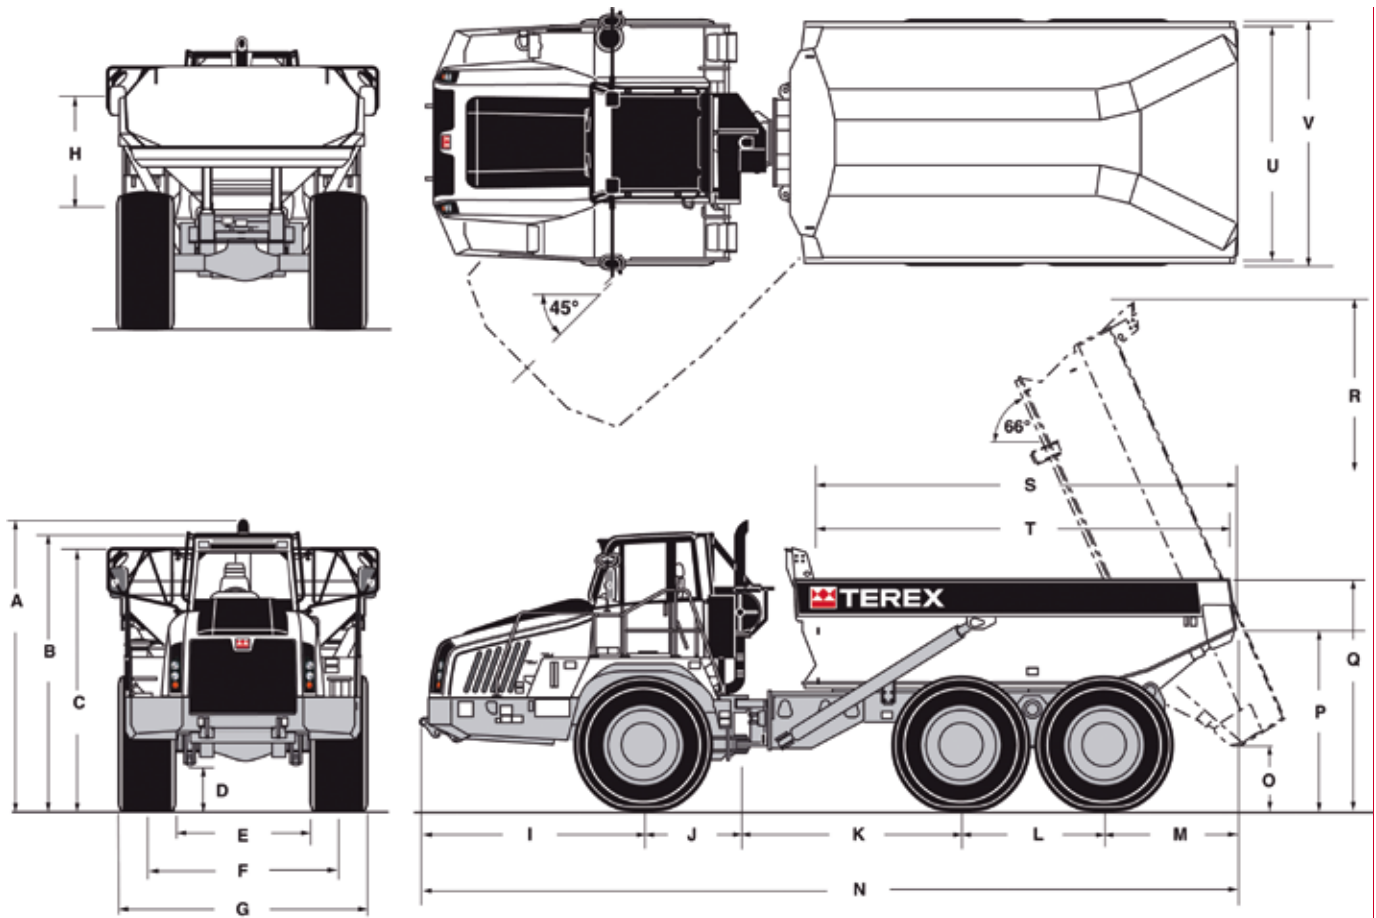

MEASUREMENTS

A	11 ft 1 in	3376 mm
B	11 ft 2 in	3420 mm
C	10 ft 3 in	3120 mm
D	1 ft 6 in	405 mm
E	5 ft 3 in	1580 mm
F	7 ft 2 in	2200 mm
G	9 ft 6 in	2895 mm
H	4 ft 1 in	1240 mm
I	8 ft 4 in	2575 mm
J	4 ft 4 in	1310 mm
K	9 ft 8 in	2945 mm
L	5 ft 6 in	1690 mm
M	4 ft 9 in	1410 mm
N	32 ft 5 in	9930 mm
O	2 ft 3 in	725 mm
P	7 ft 2 in	2175 mm
Q	8 ft 11 in	2740 mm
R	19 ft 9 in	6015 mm
S	16 ft 5 in	5000 mm
T	16 ft 2 in	4930 mm
U	8 ft 10 in	2685 mm
V	9 ft 6 in	2895 mm

WEIGHTS

Net Distribution			
Front Axle	27977 lbs		12690 kg
Bogie Axle, Leading	11834 lbs		5370 kg
Bogie Axle, Trailing	11462 lbs		5199 kg
Vehicle, Net	51277 lbs		23259 kg
Payload	55115 lbs		25000 kg
Gross Distribution			
Front Axle	37141 lbs		16847 kg
Bogie Axle, Leading	35516 lbs		16110 kg
Bogie Axle, Trailing	35023 lbs		15886 kg
Vehicle Gross	106393 lbs		48259 kg
Bare Chassis	38213 lbs		17335 kg
Body	9040 lbs		4100 kg
Hoists, pair	1170 lbs		530 kg



GROUND PRESSURE

These figures are at 15% shrinkage of unloaded radius and specified weights using

Tires	23.5 R25			
	Unloaded		Loaded	
Front	18.4 psi	127 kPa	22.3 psi	161 kPa
Rear	7.8 psi	54 kPa	22.9 psi	158 kPa



GRADEABILITY

Unit equipped with 23.5 R25 tires. Graphs based on 2% Rolling Resistance.

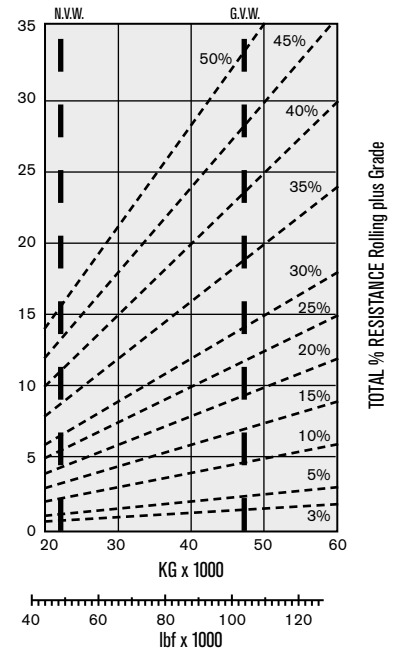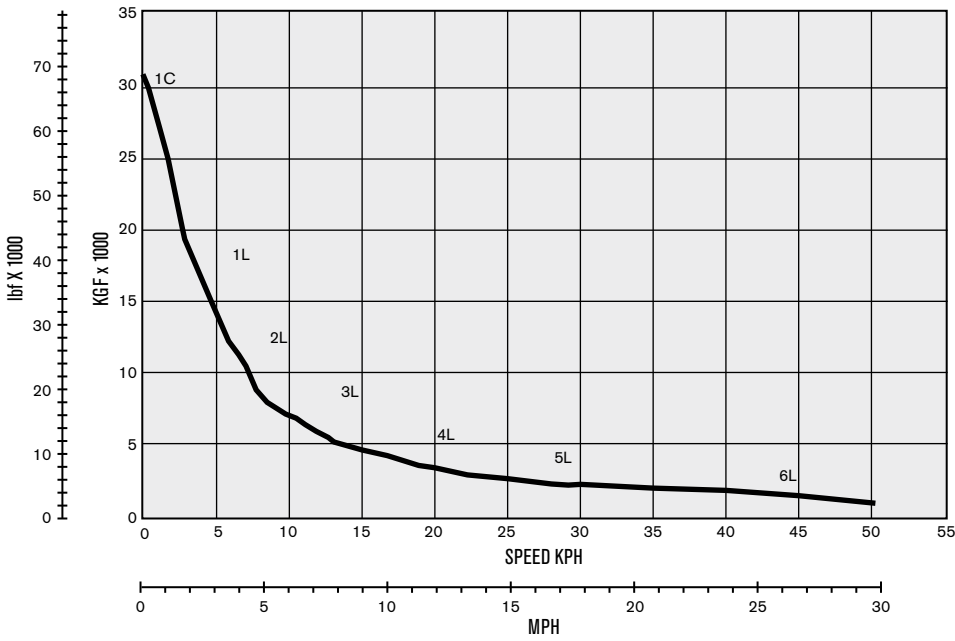

RETARDATION

Instructions: From intersection of vehicle weight with percentage resistance line read across to determine maximum gear attainable, and then downwards for speed.

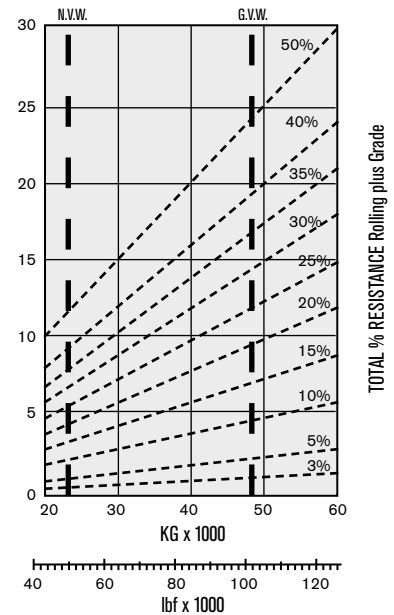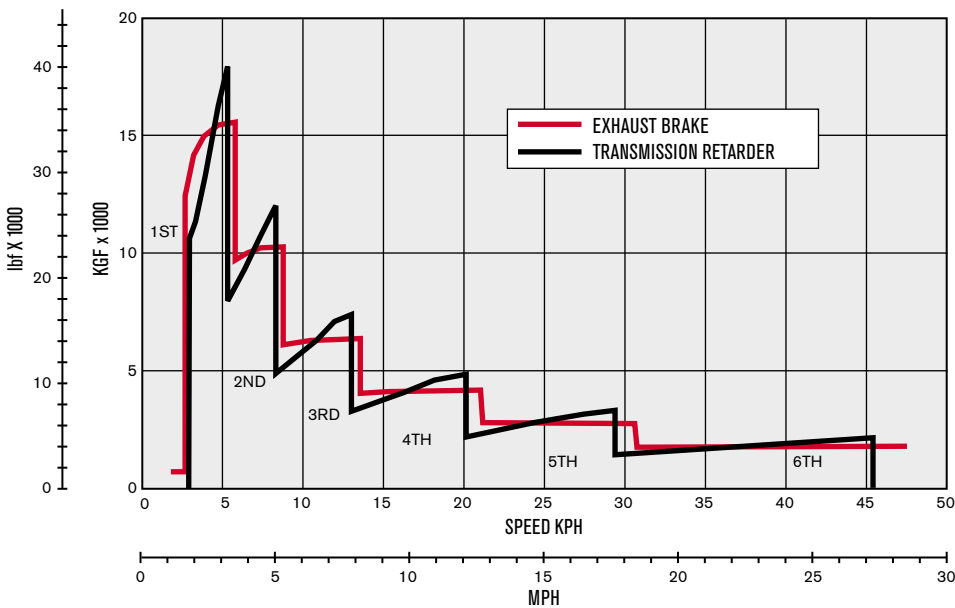

www.terexconstruction.com

Effective Date: August 2011. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and Terex makes no other warranty, express or implied. Products and services listed may be trademarks, service marks, or trade names of Terex Corporation and/or its subsidiaries in the USA and other countries. All rights are reserved. Terex is a registered trademark of Terex Corporation in the USA and many other countries. © 2011 Terex Corporation.



AUTO TRANS spol. s r.o.
Konecchlumského 513, 506 01 Jičín
telefon: +420 493 538 066
e-mail: info@atsjicin.cz

Prodej vozidel a strojů
+420 733 539 789
+420 603 497 392
prodej@atsjicin.cz



WORKS FOR YOU.™

TA250 T4 082011 PN 1090917